

AK HR series

high rejection low energy brackish water RO elements

The A-Series proprietary thin-film reverse osmosis membrane elements are characterized by high flux and high sodium chloride rejection. AK HR low pressure brackish elements are selected when high rejection and low operating pressures are desired. These elements allow significant energy savings since good rejection is achieved at operating pressures as low as 100 psig (689 kPa).

These elements are recommended for low brackish water with salt concentration (TDS) levels up to 5,000mg/l. In turn, AK HR elements produce a permeate quality close to a standard brackish membrane element at a much lower pressure.

AK HR Series is certified to NSF/ANSI 61 [AK-400, 34 NSF/ANSI certification is pending].

Table 1: Element Specification

Membrane	Thin-film membrane (TFM*)
----------	---------------------------

Model	Average permeate flow gpd (m ³ /day) ^{1,2}	Average NaCl rejection ^{1,2}	Minimum NaCl rejection ^{1,2}
AK-90	2300 (8.7)	99.5%	99.0%
AK-365	10,000 (37.9)	99.5%	99.0%
AK-400	11,000 (41.6)	99.5%	99.0%
AK-400,34	11,000 (41.6)	99.5%	99.0%
AK-440	12,000 (45.4)	99.5%	99.0%

¹Average salt rejection after 24 hours operation. Individual flow rate may vary ±20%.

²Testing conditions: 500ppm NaCl solution at 115psi (793kPa) operating pressure, 77°F (25°C), pH7.5 and 15% recovery.

Find a contact near you by visiting www.suezwatertechnologies.com and clicking on "Contact Us."

*Trademark of SUEZ; may be registered in one or more countries.

©2020 SUEZ. All rights reserved.

Model	Active area ft ² (m ²)	Outer wrap	Part number
AK-90	90 (8.4)	Fiberglass	3056678
AK-365	365 (33.9)	Fiberglass	3056679
AK-400	400 (37.2)	Fiberglass	3056680
AK-400,34	400 (37.2)	Fiberglass	3156843
AK-440	440 (40.9)	Fiberglass	3056681

Figure 1a: Element Dimensions Diagram – Male

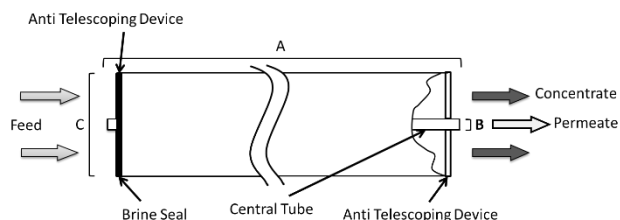


Figure 1b: Element Dimensions Diagram – Female

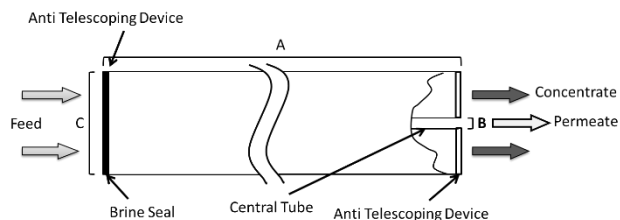


Table 2: Operating and CIP parameters

Typical Operating Pressure	120 psi (830 kPa)
Typical Operating Flux	10-20GFD (15-35LMH)
Maximum Operating Pressure	600 psi (4,136 kPa)
Maximum Temperature	Continuous operation: 122°F (50°C) Clean-In-Place (CIP): 122°F (50°C)
pH range	Optimum rejection pH: 7.0-7.5, Continuous operation: 2.0-11.0, Clean-In-Place (CIP): 1.0-13.0 (1)
Maximum Pressure Drop	Over an element: 15 psi (103 kPa) Per housing: 50 psi (345 kPa)
Chlorine Tolerance	1,000+ ppm-hours, dechlorination recommended
Feedwater²	NTU < 1 SDI ₁₅ < 5

(1) Please refer to Cleaning Guidelines Technical Bulletin TB1194.

Table 3: Dimensions and Weights

Model	Type	Dimensions, inches (cm)			Boxed
		A	B	C	Weight lbs (kg)
AK-90	Male	40.0 (101.6)	0.75 (1.90)	3.9 (9.9)	9 (4)
AK-365	Female	40.0 (101.6)	1.125 (2.86)	7.9 (20.1)	35 (16)
AK-400	Female	40.0 (101.6)	1.125 (2.86)	7.9 (20.1)	35 (16)
AK-400,34	Female	40.0 (101.6)	1.125 (2.86)	7.9 (20.1)	35 (16)
AK-440	Female	40.0 (101.6)	1.125 (2.86)	7.9 (20.1)	35 (16)