





CLFVietNam





SMART IDEAS FOR WATER

- . Water Filter Device
- . Water Filling Line
- . Water Treatment System
- . 3 - 5 Gallon Filling Machine


Cooling module catalogue

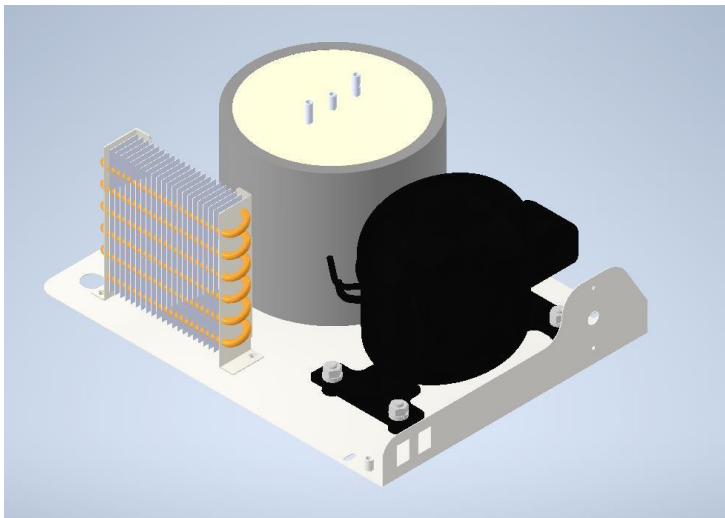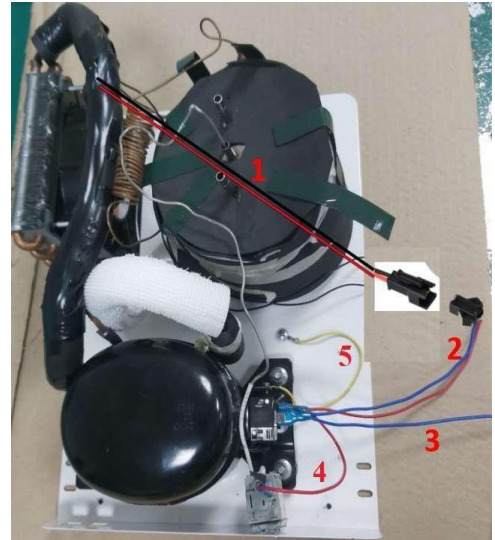

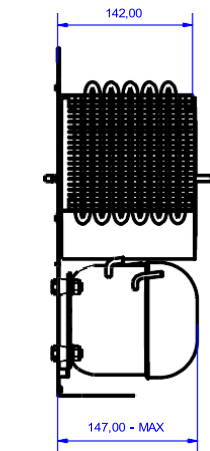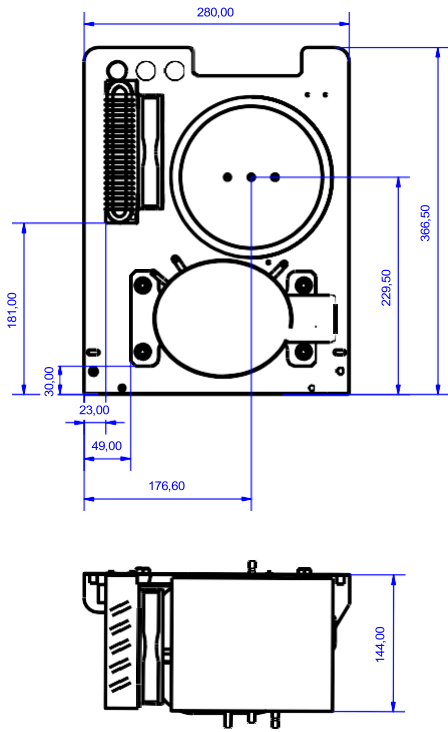

HEIGHT OF COPPER WELDING PIPES SHALL NOT EXCEED 147MM

No.	Name	Spec.	Qty	Note
1	Compressor		01	
2	Condenser		01	
3	Condenser Fan		01	
4	Evaporator & Tank		01	
5	Metal sheet for installation		01	
6	Hexagon M8x25	ZinC, M8x25mm	04	
7	Hex nut M8	ZinC, M8	04	
8	Flat Washer M8	ZinC, M8	04	
9	Spring washer	Zinc, M8	04	

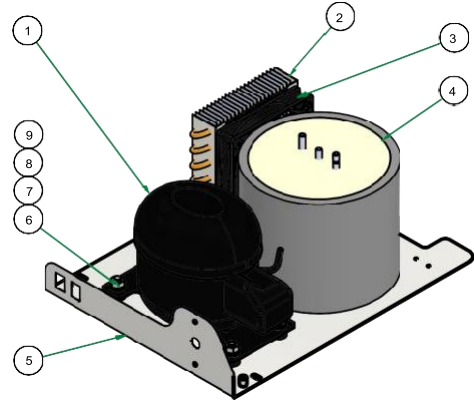

Technical data*

Uniform sealing pressure of 14mWC

Leaksealingbags	Size (LxWxH) cm	Sealingarea cm	Air requirement at 1.5bar litre	Single bag weight, approx. kg	Weight set, approx. kg
LD50/30W 1500005102	61.5 x 30 x 2	50 x 30	17.5	6.9	31.7
LD50/30S 1500005401	61.5 x 30 x 2	50 x 30	17.5	4.3	29

*Subject to change without notice

Leaksealing bags:

Operating pressure: 1.5 bar | Test pressure: 1.95 bar

W:Swivel eyes | **S:**Belt slots


Specialleak sealingbags	Size (LxWxH) cm	Sealingarea cm	Sealingpressure mWC	Air requirement litre	Single bag weight, approx. kg	Weight set, approx. kg
LD110/60S,XL 1500014500	110 x 60 x 2	86 x 57	14	190	16	39.5





*Subject to change without notice




Special leak sealing bags:

Operating pressure: 1.5 bar

Test pressure: 1.95 bar

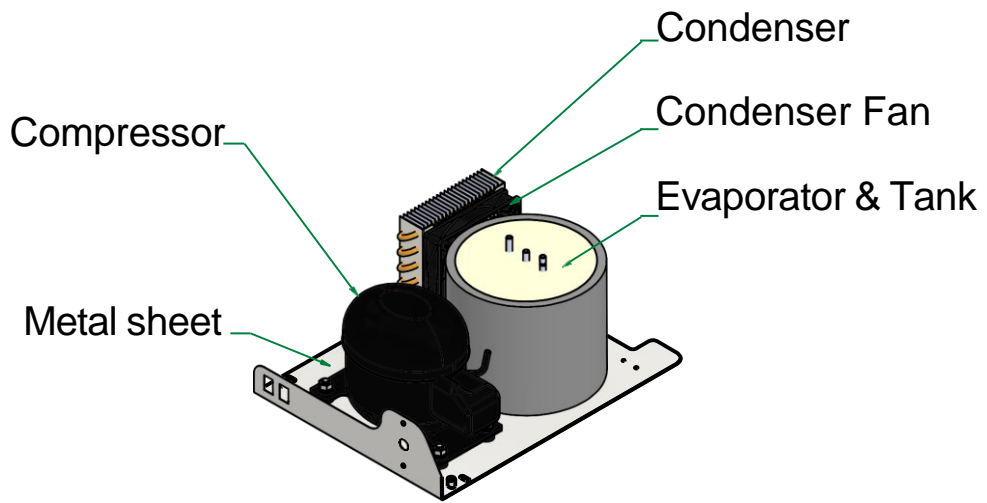

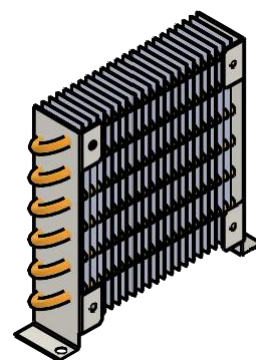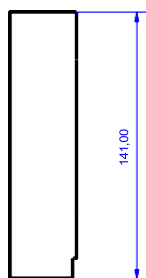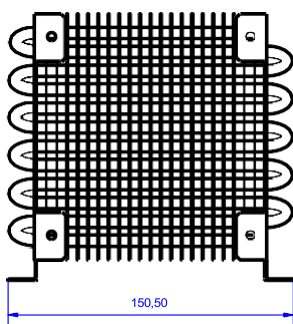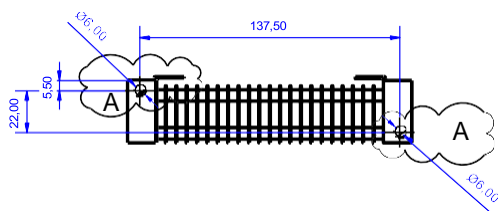

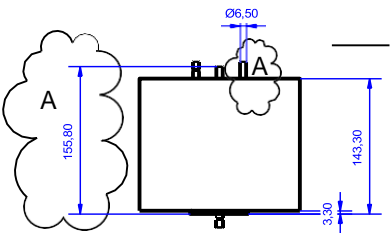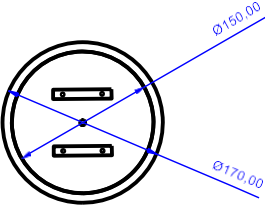

Polyurethane
Thickness: 15mm

Nitrile Rubber
Thickness: 10mm

